

# ELEVATION CERTIFICATE

**Important:** Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A – PROPERTY INFORMATION					FOR INSURANCE COMPANY USE	
A1. Building Owner's Name Jehovah's Witnesses Kingdom Hall					Policy Number:	
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 1170 E. 9th St.					Company NAIC Number:	
City Mountain Home		State Idaho		ZIP Code 83647		
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.) Lot 39 Sec. 36, T3S, R6E.						
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) <u>Non-Residential (Church)</u>						
A5. Latitude/Longitude: Lat. <u>43°07'23.48"N</u> Long. <u>115°41'07.13"W</u> Horizontal Datum: <input type="checkbox"/> NAD 1927 <input checked="" type="checkbox"/> NAD 1983						
A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insurance.						
A7. Building Diagram Number <u>9</u>						
A8. For a building with a crawlspace or enclosure(s):						
a) Square footage of crawlspace or enclosure(s) <u>1795.27</u> sq ft						
b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade <u>9</u>						
c) Total net area of flood openings in A8.b <u>945.00</u> sq in						
d) Engineered flood openings? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No						
A9. For a building with an attached garage:						
a) Square footage of attached garage <u>0.00</u> sq ft						
b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade <u>0</u>						
c) Total net area of flood openings in A9.b <u>0.00</u> sq in						
d) Engineered flood openings? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No						
SECTION B – FLOOD INSURANCE RATE MAP (FIRM) INFORMATION						
B1. NFIP Community Name & Community Number City of Mountain Home			B2. County Name Elmore		B3. State Idaho	
B4. Map/Panel Number 16005805	B5. Suffix C	B6. FIRM Index Date 03-15-1994	B7. FIRM Panel Effective/ Revised Date 03-15-1994	B8. Flood Zone(s) AE	B9. Base Flood Elevation(s) (Zone AO, use Base Flood Depth) 3126.50	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9: <input checked="" type="checkbox"/> FIS Profile <input type="checkbox"/> FIRM <input type="checkbox"/> Community Determined <input type="checkbox"/> Other/Source: _____						
B11. Indicate elevation datum used for BFE in Item B9: <input checked="" type="checkbox"/> NGVD 1929 <input type="checkbox"/> NAVD 1988 <input type="checkbox"/> Other/Source: _____						
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Designation Date: _____ <input type="checkbox"/> CBRS <input type="checkbox"/> OPA						











# BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008  
Expiration Date: November 30, 2018

## ELEVATION CERTIFICATE

<b>IMPORTANT: In these spaces, copy the corresponding information from Section A.</b>			<b>FOR INSURANCE COMPANY USE</b>
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 1170 E. 9th St.			Policy Number:
City Mountain Home	State Idaho	ZIP Code 83647	Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Front

Photo One Caption

Clear Photo One



Side

Photo Two Caption

Clear Photo Two



# BUILDING PHOTOGRAPHS


OMB No. 1660-0008  
Expiration Date: November 30, 2018

## ELEVATION CERTIFICATE

Continuation Page

<b>IMPORTANT: In these spaces, copy the corresponding information from Section A.</b>			<b>FOR INSURANCE COMPANY USE</b>
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 1170 E. 9th St.			Policy Number:
City Mountain Home	State Idaho	ZIP Code 83647	Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

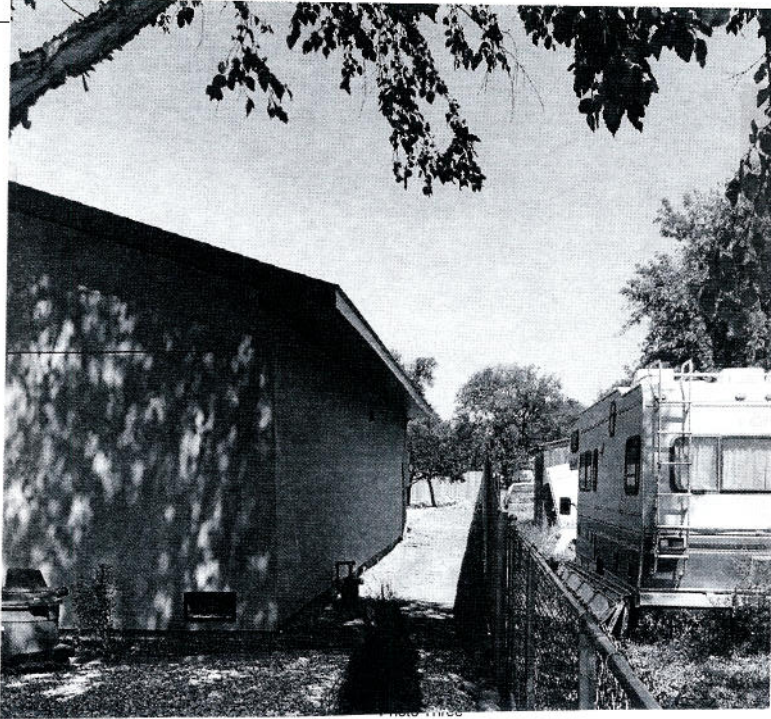

Side

Photo Three Caption

Clear Photo Three



Back.  
Side


Photo Four Caption

Clear Photo Four




# FEMA COMPLIANT FLOOD VENT

## 8"X16" ENGINEERED FLOOD VENT

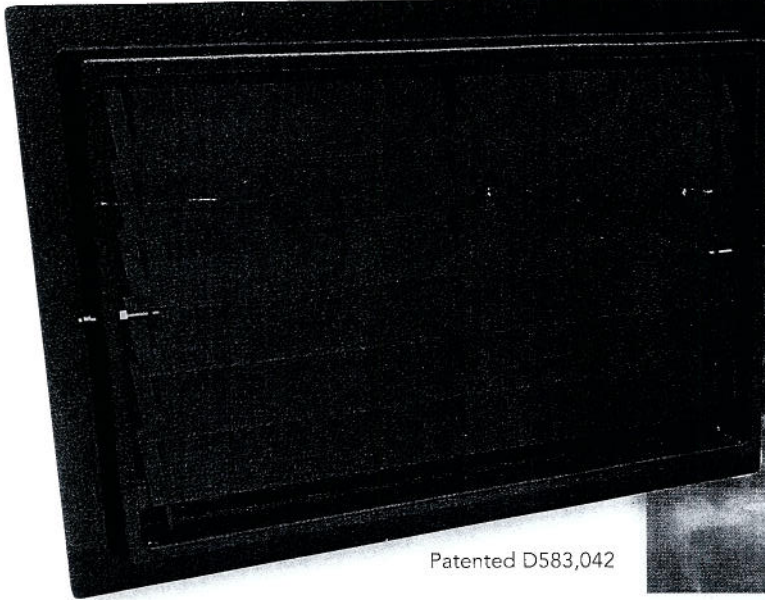

Patented D583,042

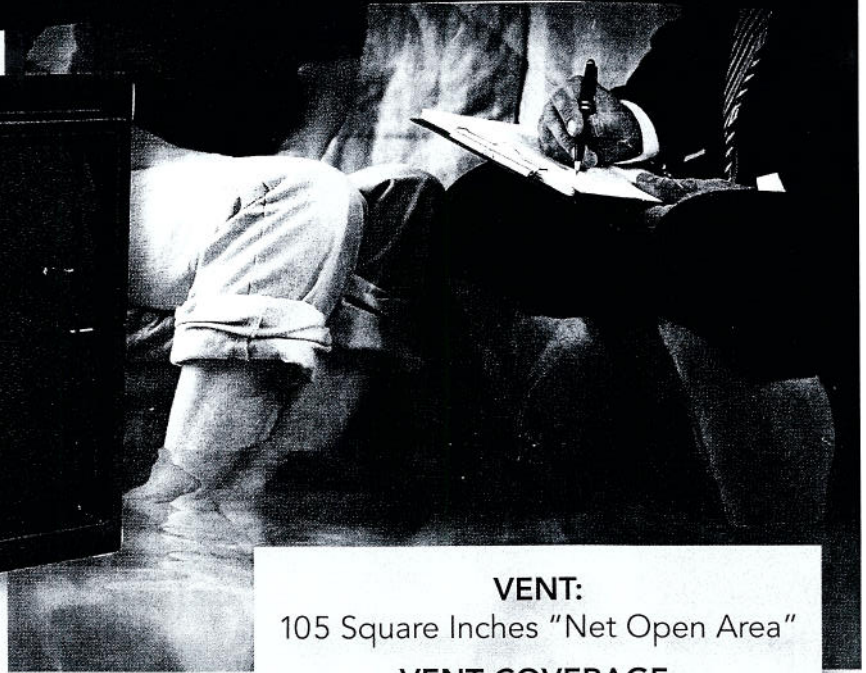

### VENT:

105 Square Inches "Net Open Area"

### VENT COVERAGE:

205 Square Feet "Enclosed Area"

### FEMA: TECHNICAL BULLETIN – AUGUST 2008 (Page 24) Non-Engineered Openings

#### Engineered Openings

Openings that are designed and certified by a registered design professional as meeting the performance required by the regulations are called "engineered openings." This section describes certification and documentation requirements for engineered openings and the specific design requirements.

#### Engineered openings with individual certification

For architectural or other reasons, building designers or owners may prefer to use unique or individually designed openings or devices. In these cases, a registered design professional must submit a certification. As a general rule, States require a designer to be licensed to practice in the State in which building is located.

The original certification of the engineered openings must include the design professional's name, title, address, signature, type of license, license number, the State in which

the license was issued, and the signature and applied seal of the certifying registered design professional. The certification shall identify the building in which the engineered openings will be installed. The language of the certification shall address the following:

- A statement certifying that the openings are designed to automatically equalize hydrostatic flood loads on exterior walls by allowing the automatic entry and exit of floodwaters in accordance with the Engineered openings, design requirements on page 26,
- Description of the range of flood characteristics tested or computed for which the certification is valid, such as rates of rise and fall of floodwaters, and
- Description of the installation requirements or limitations that, if not followed, will void the certification.



Flood Protection



# Certification of Engineered Flood Openings

In accordance with NFIP, FEMA TB 1-08, and ASCE/SEI 24-05

I hereby certify that the **Crawl Space Door Systems flood vents 816CS, 1220CS, 1232CS, 1616CS, 1624CS, 1632CS, 2032CS, 2424CS, and 2436CS** are designed in accordance with the requirements of the NFIP "Flood Insurance Manual" (2011) to provide automatic equalization of hydrostatic flood forces by allowing for the entry and exit of floodwaters, when properly installed and sized as set forth below. This certification follows the design requirements and specifications established in FEMA Technical Bulletin 1-08, "Openings in Foundation Walls and Walls of Enclosures Below Elevated Buildings in Special Flood Hazard Areas", and the ASCE Standard for "Flood Resistant Design and Construction" (ASCE/SEI 24-05).

## Design Characteristics

Section 2.6.2.2 of ASCE 24 provides an equation to determine the required net area of engineered openings ( $A_o$ ) for a given enclosed area ( $A_e$ ). This equation is based on the hydraulic formula for the flow rate across sharp edged orifices. I have utilized this equation to calculate 1) the respected flow rate through the individual openings between louvers; 2) the flow rate through the main frame opening in case the louver is blown out during a flood event; and 3) the flow rate of water flowing through louver blades following hydraulic short tube theory. The ultimate maximum total enclosed area ( $A_e$ ) that can be serviced by a single vent has then been determined by utilizing the lowest flow rate of the three assessed scenarios for each vent and is listed in Table 1.

These values are based on the following assumptions:

- In absence of reliable data, the rates of rise and fall have been assumed with 5 feet/hour;
- The (maximum) difference between the exterior and interior floodwater levels has been assumed with 1 foot during base flood conditions;
- A factor of safety of 5 has been assumed, which is consistent with design practices related to protection of life and property;
- The net area of openings ( $A_o$ ) as provided by the manufacturer.

*)	Model	H x W [in]	$A_o$ [in <sup>2</sup> ]	$A_e$ [ft <sup>2</sup> ]
<input checked="" type="checkbox"/>	816CS	8 x 16	105	<b>205</b>
<input type="checkbox"/>	1220CS	12 x 20	235	<b>500</b>
<input type="checkbox"/>	1232CS	12 x 32	305	<b>645</b>
<input type="checkbox"/>	1616CS	16 x 16	180	<b>395</b>
<input type="checkbox"/>	1624CS	16 x 24	310	<b>670</b>
<input type="checkbox"/>	1632CS	16 x 32	405	<b>835</b>
<input type="checkbox"/>	2032CS	20 x 32	630	<b>1240</b>
<input type="checkbox"/>	2424CS	24 x 24	570	<b>1230</b>
<input type="checkbox"/>	2436CS	24 x 36	850	<b>1765</b>

**Table 1** Maximal total enclosed area ( $A_e$ ) that can be served by each individual model based on the given net area of engineered openings ( $A_o$ )

## Installation Requirements and Limitations

This certification will be voided if the following installation requirements and limitations are not enforced:


- There shall be a minimum of two openings on different sides of each enclosed area;
- The bottom of each required opening shall be no more than 1ft above the adjacent ground level;
- No temporary (e.g. during cold weather) or permanent solid cover may be placed into or over the flood vent that would block the automatic entry or exit of floodwaters at any time;
- Where analysis indicates rates of rise and fall greater than 5 ft/hr, the total enclosed area as given in Table 1 shall be reduced accordingly to account for the higher rates of rise and fall.

## Identification of the Building and Installed Flood Vents

The flood vent models marked in Table 1\*) are being installed at the following building:

*Building Address*

## Certifying Design Professional

<i>Name</i>	Christopher Mark Loney	
<i>Title</i>	Mechanical Engineer	
<i>Address</i>	1675 Meredith Road, Virginia Beach, VA 23455	
<i>Type of License</i>	Professional Engineer	
<i>License #</i>	0402029000	
<i>Issuing State</i>	Virginia	

