ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances. to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME TO FORFE	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit. Suite and o' Bidg. Number) OR P.O. ROUTE AND E	OX NUMBER COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) OTHER DESCRIPTION (Lot and Block Numbers, etc.) OTHER DESCRIPTION (Lot and Block Numbers, etc.)	tion
Mountain Home.	STATE B3647
SECTION B FLOOD INSURANCE RATE	MAP (FIRM) INFORMATION
Provide the following from the proper FIRM (See Instructions):	7.7.39
Only Panel	F FIRM INDEX 5. FIRM ZONE 6. BASE FLOOD ELEVATION (IN AO Zones, use depth) 3135
7. Indicate the elevation datum system used on the FIRM for Base Flood E 8. For Zones A or V. where no BFE is provided on the FIRM, and the community's BFE:	nunity has established a BFE for this building site, indicate
SECTION C BUILDING ELEVA	
 (a). FIRM Zones A1-A30. AE, AH, and A (with BFE). The top of the refere of 3/35.9 feet NGVD (or other FIRM datum—see Section B, It (b). FIRM Zones V1-V30. VE. and V (with BFE). The bottom of the lowest the selected diagram, is at an elevation of feet NGVD (c). FIRM Zone A (without BFE). The floor used as the reference level from below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected one) the highest grade adjacent to the building. If no flood depth number level elevated in accordance with the community's floodplain manager. Indicate the elevation datum system used in determining the above refere under Comments on Page 2). (NOTE: If the elevation datum used in meather FIRM [see Section B, Item 7], then convert the elevations to the date equation under Comments on Page 2.) Elevation reference mark used appears on FIRM: Yes \[\begin{array}{c} \text{No (See In the Section B)} No (See	hem 7). horizontal structural member of the reference level from (or other FIRM datum—see Section B, Item 7). m the selected diagram is feet above or ed diagram is feet above or below (check per is available, is the building's lowest floor (reference ment ordinance? Yes No Unknown ence level elevations: NGVD '29 Other (describe assuring the elevations is different than that used on the FIRM and show the conversion
The reference level elevation is based on: actual construction construction construction drawings is only valid if the building does not case this certificate will only be valid for the building during the course of construction is complete.) The elevation of the lowest grade immediately adjacent to the building is: Section B. Item 7).	onstruction drawings t yet have the reference level floor in place, in which construction. A post-construction Elevation Certificate
SECTION D COMMUNITY II	NFORMATION
If the community official responsible for verifying building elevations specifies not the "lowest floor" as defined in the community's floodplain managem floor" as defined by the ordinance is: feet NGVD (or other Date of the start of construction or substantial improvement	nent ordinance, the elevation of the building's "lowest

2

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available.

TITLE J. HOWARD
ENGINEERING & SURVEYING
ADDRESS BOISE, IDAHO 83702
(208) 344-0574
SIGNATURE

Company Name

Company

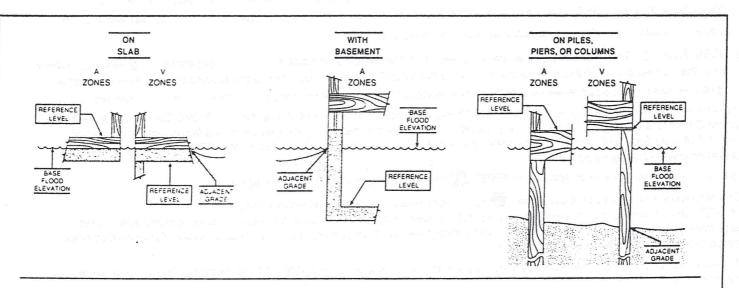

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.